Product Information Sheet

trol gear, light-

control

ing


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| sources | | | - | |
|--|-------------------|-------------------------|--|--------------|
| Supplier's name | e or trade mark: | YEELIGHT | | |
| Supplier's addre | ess: Byron, Flurw | veg 11, 82402 Seesh | naupt, DE | |
| Model identifie | r: YLBGD-0046 | | | |
| Type of light so | urce: | | | |
| Lighting technology used: | | LED | Non-directional or directional: | NDLS |
| Light source cap-type | | USB Type C | | |
| (or other electric interface) | | | | |
| Mains or non-mains: | | NMLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | | No | Envelope: | - |
| High luminance light source: | | No | | |
| Anti-glare shield: | | No | Dimmable: | No |
| | | Product para | | I |
| Parameter | | Value | Parameter | Value |
| | | General product p | | I |
| Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer | | 3 | Energy efficiency class | G |
| Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | | 180 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000 |
| On-mode power (P _{on}), expressed in W | | 2,4 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,50 |
| Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal | | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 80 |
| Outer dimen- | Height | 600 | Spectral power dis- | See image |
| sions without | Width | 40 | tribution in the | in last page |
| separate con- trol gear, light- | Depth | 9 | range 250 nm to 800 nm. at full-load | |

nm, at full-load

| parts and non- lighting con- trol parts, if any (millime- tre) | | | | | | | |
|--|------|------------------------------|-------|--|--|--|--|
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | | | | |
| | | Chromaticity coordi- | 0,380 | | | | |
| | | nates (x and y) | 0,380 | | | | |
| Parameters for LED and OLED light sources: | | | | | | | |
| R9 colour rendering index value | 1 | Survival factor | 0,90 | | | | |
| the lumen maintenance factor | 0,96 | | | | | | |

(a)'-': not applicable; (b)'-': not applicable;

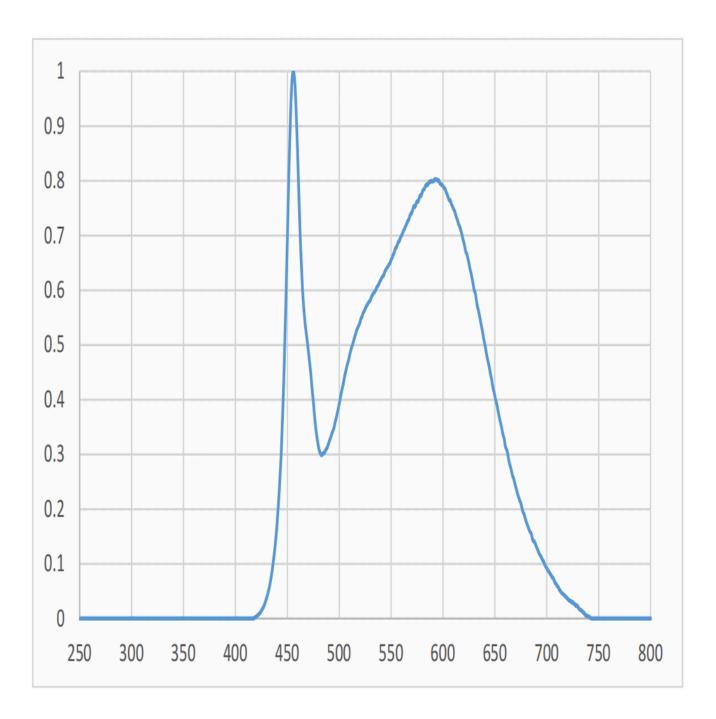

Model placed on the Union market from 01/09/2021



EPREL registration number: 848861 https://eprel.ec.europa.eu/qr/848861

Supplier: Yeelight Germany GmbH (Authorised representa Website: https://www.yeelight.de/

tive)

Customer care service:

Name: Byron Website:

Email: qiaoyouchun@yeelight.com Phone: +86 15065752726

Address: Flurweg 11 82402 Seeshaupt

Germany