Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Platinet

Supplier's address: IMPORT, Tadeusza Ślwiaka 48, 30-798 kraków Kraków małopolskie, PL

Model identifier: PDL6731NB

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Containing product with fixed LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

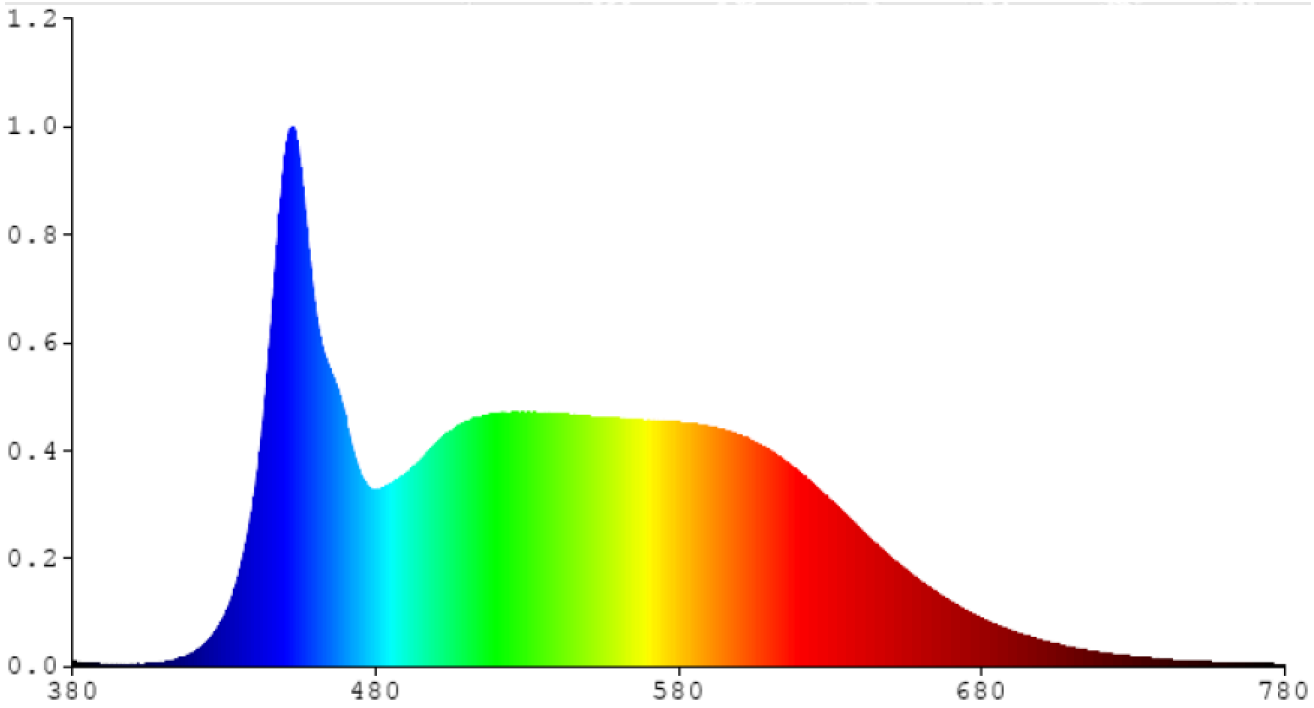
Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	G
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	200 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3700...4200
On-mode power (P_{on}), expressed in W	5,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height: 310	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width: 125		
	Depth: 369		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[a]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,396 0,392
Parameters for directional light sources:				
Peak luminous intensity (cd)		200	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:				
R9 colour rendering index value		13	Survival factor	-
the lumen maintenance factor		-		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,00	Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[b]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,0	Stroboscopic effect metric (SVM)	0,0

[a] '-' : not applicable;

[b] '-' : not applicable;


1.2
1.0
0.8
0.6
0.4
0.2
0.0
380
480
580
680
780

Model placed on the Union market from 18/05/2020

EPREL registration number: 650478

https://eprel.ec.europa.eu/qr/650478

Supplier: Platinet S.A. (Importer)

Website: www.platinet.eu

Customer care service:

Name: IMPORT

Website: www.platinet.eu

Email: sandra.kus@platinet.eu

Phone: 536297393

Address:
Tadeusza Ślwiaka 48
30-798 Kraków
Poland