Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: green:ID

Supplier's address: Ledelse, Mariendalsvej 28, 8800 Viborg, DK

Model identifier: 68300

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	DC ledningstil-slutning		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

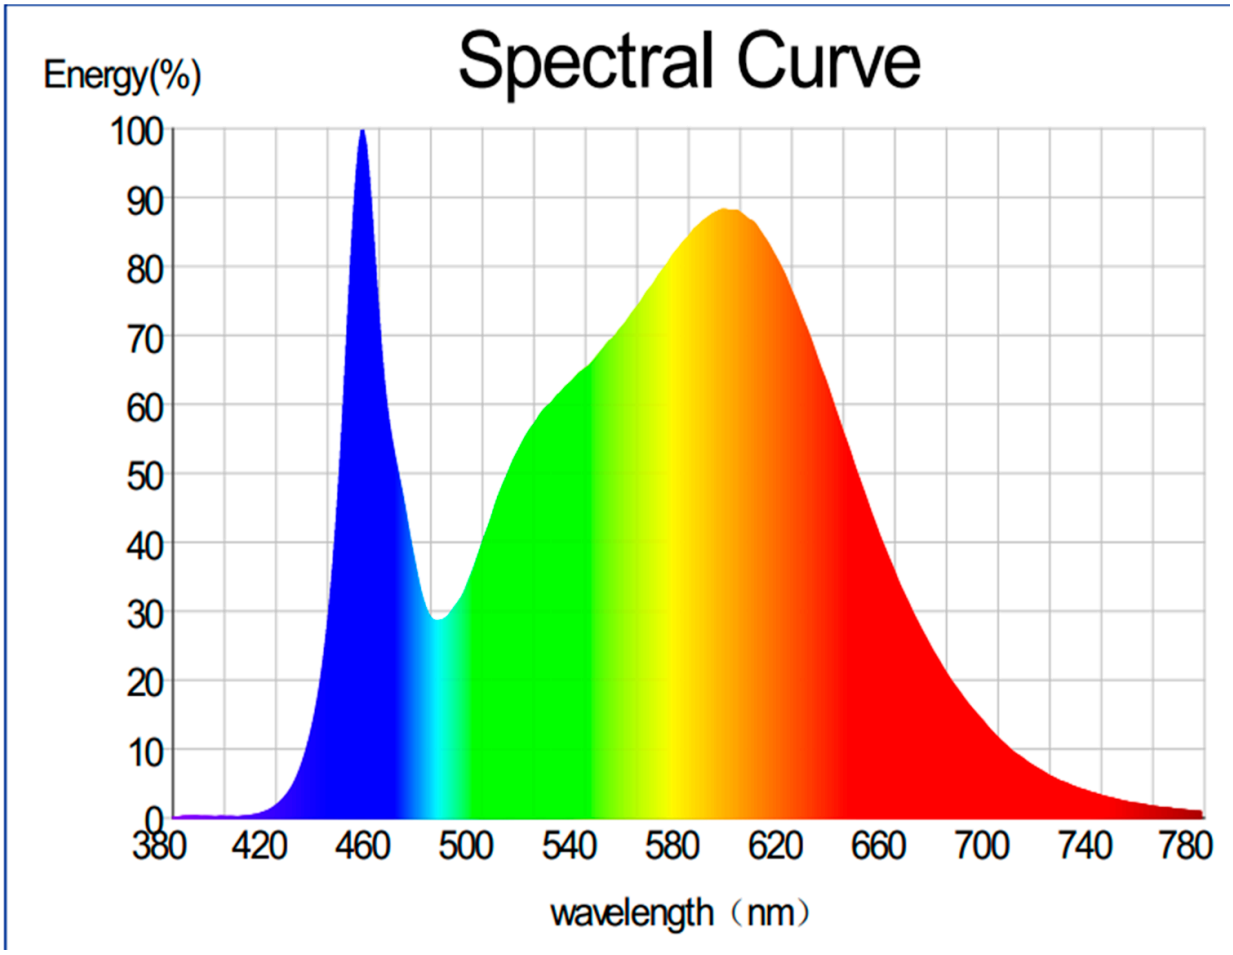
Product parameters

Parameter		Value	Parameter	Value
General product parameters:				
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		17	Energy efficiency class	F
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)		1 412 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W		17,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	26	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	600		
	Depth	56		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[(a)]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,382 0,378
Parameters for directional light sources:				
Peak luminous intensity (cd)		528	Beam angle in degrees, or the range of beam angles that can be set	108
Parameters for LED and OLED light sources:				
R9 colour rendering index value		10	Survival factor	1,00
the lumen maintenance factor		1,00		

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;


Spectral Curve
Energy(%)
100
90
80
70
60
50
40
30
20
10
0
380
420
460
500
540
580
620
660
700
740
780
wavelength（nm）

EPREL registration number: 2487553 Model placed on the Union market from 16/09/2025.	https://eprel.ec.europa.eu/qr/2487553

Supplier: SEC SET ECOFOSS A/S (Manufacturer) **Website:** green-id.dk

Customer care service:

Name: Ledelse **Website:** green-id.dk

Email: info@sse-as.dk **Phone:** 70606560

Address:
Mariendalsvej 28
8800 Viborg
Denmark