

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Platinet

Supplier's address: IMPORT, Tadeusza Ślwiaka 48, 30-798 Kraków Kraków małopolskie, PL

Model identifier: PDL1930B

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Containing product with fixed LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	300 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 700 or 4 200 or 6 500
On-mode power (P_{on}), expressed in W	10,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	175	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	115	
	Depth	65	
			See image in last page


ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,310 0,330
Parameters for directional light sources:			
Peak luminous intensity (cd)	300	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:			
R9 colour rendering index value	13	Survival factor	0,90
the lumen maintenance factor	0,90		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,00	Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a)'.-' : not applicable;

(b)'.-' : not applicable;

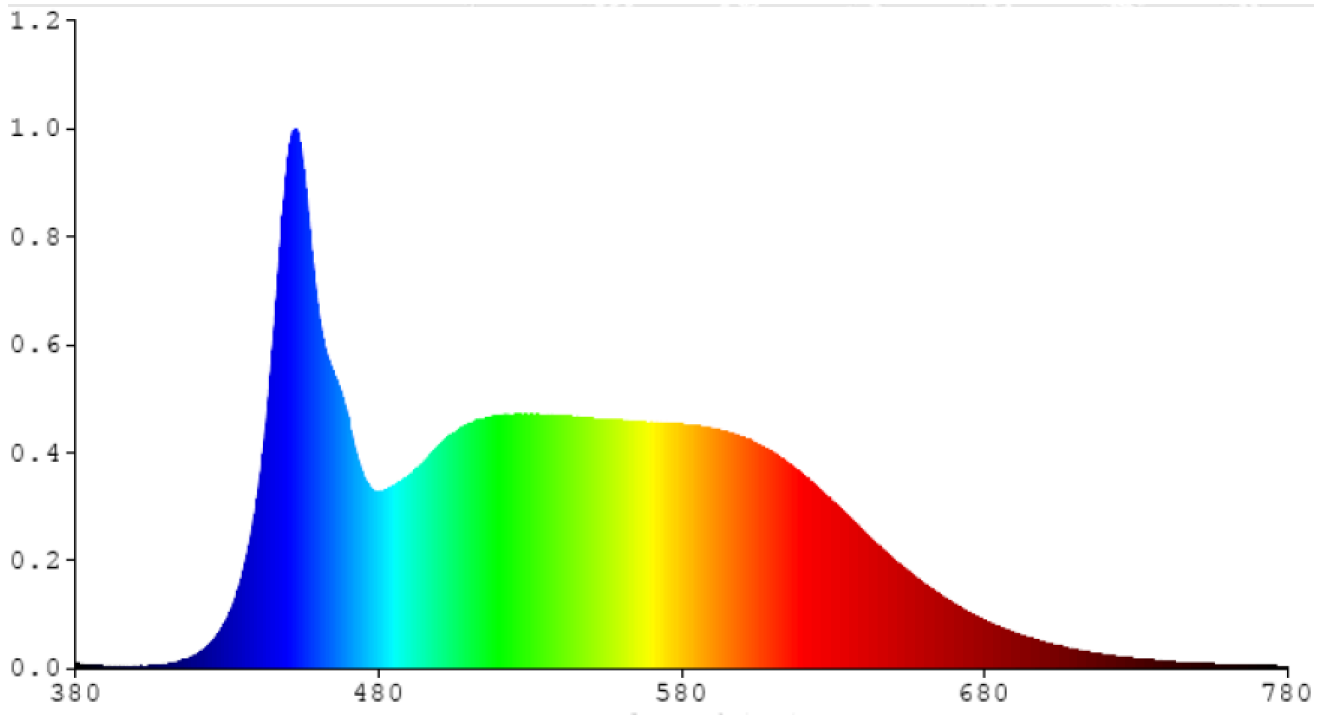

Model placed on the Union market from 10/03/2020



EPREL registration number: 650666

<https://eprel.ec.europa.eu/qr/650666>

Supplier: Platinet S.A. (Importer)

Website: www.platinet.eu

Customer care service:

Name: IMPORT

Website: www.platinet.eu

Email: sandra.kus@platinet.eu

Phone: 536297393

Address:

Tadeusza Ślwiaka 48

30-798 Kraków

Poland